



MAFELEC Creating control and signalling solutions for harsch environments

Lighting box

LED lighting



- **Optimized power consumption**
- **Anti-fog system**
- **Application for extreme cold**
- 50°C



Standards:

- | | |
|-------------------|---------------------------|
| • Application | EN 50155 |
| • EMC | EN 50121-3-2 |
| • Shock,vibration | EN 61373 |
| • Environment | EN 60068, EN 60529 |
| • Fire / smoke | NF F 16-101/102, EN 45545 |

Mechanical characteristics:

- Zamak box (chromating and paint)
- IK 06
- Coated glass thickness: 5mm
- Cable gland PG16
- Fixing: 4 screws M4
- Integrated anti condensation valve

Electrical characteristics:

- 3 LED power
- Regulated current
- Polarity reversal protection
- Connection: Faston type
- Supply voltage: 24 VDC, 72 VDC, 110 VDC (- 30% / + 25%)
- Consumption: nominal power 2 W, max. 5 W

Environmental Characteristics:


- Casing IP 66 (Sealing connection to be defined with the customer)
- Resistance to salt mist: 96h
- Operating temperature: - 50° +70°

Optical characteristics:

- Opening angle: 40° / 60°
- 170 to 250 Cd in the axis.
- White (daylight) 5000k

Dimensions:

Dimensions in mm

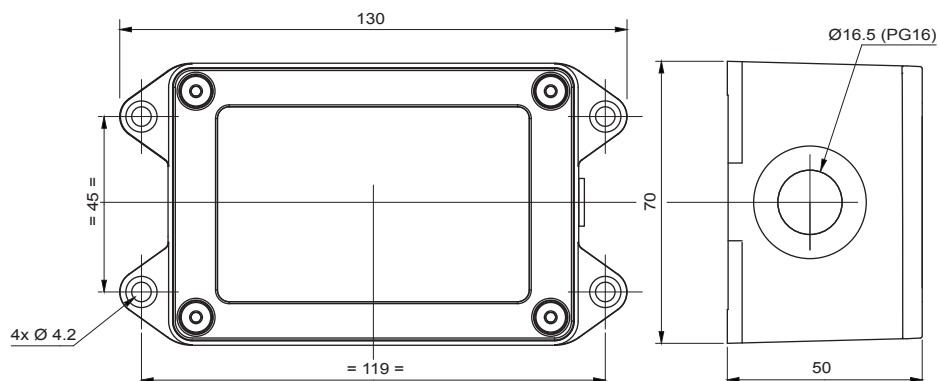

AEROSPACE
& DEFENCE



COACHES
& BUSES



RAILWAY



INDUSTRY



ENERGY



PLEASURE
BOAT



VERTICAL
TRANSPORT



INDUSTRIAL
VEHICLES



OFFSHORE
& MINING

MAFELEC
www.mafelec.com

Textes et images non contractuels

(update 2017/06)