



MAFELEC

Creating control and signalling solutions for harsh environments

M-Door range Slim

A push button for stop request
and opening door applications



- **Active surface Ø 40mm**
- **Assembly on Ø 35 mm pole**
- **Railway and Bus standards compliant**
- **Unlimited choice of back lit pictograms and colours**
- **Standard or customised electronics**



Standards (depending on model):

- **Conception** TSI PRM 2015
- **Application** EN 50155
- **EMC** EN 50121-3-2
- **Environment** EN 60068, EN 60529
- **Fire / smoke** NF F 16 101 / 102, EN 45545-2
- **REACH / ROHS**

Mechanical characteristics:


- Operating temperature: - 40°C / + 85°C (depending on cable)
- Mechanical service life: 3 000 000 operations
- Protection: IP67/65
- Haptic feel
- Installation on pole or flat surface

Lighting characteristics:




- Unlimited choice of back lit pictograms with changing colour
- This change of colour can be automatic or remotely controlled

Electrical characteristics:


- Operating voltage 12 , 24, or 36 VDC (Other voltages on request)
- Reverse polarity protection
- Important service life



Pole version

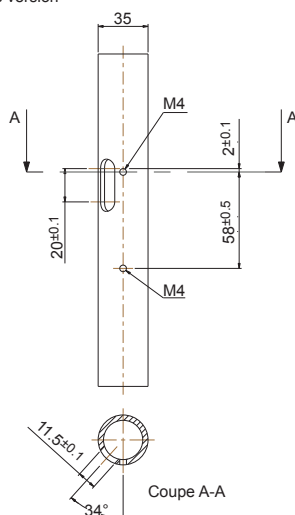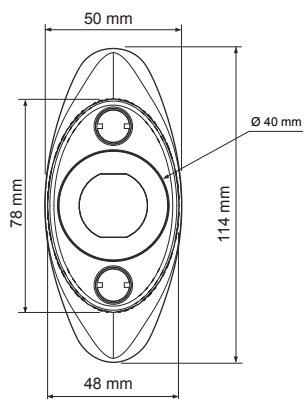

Flat surface version

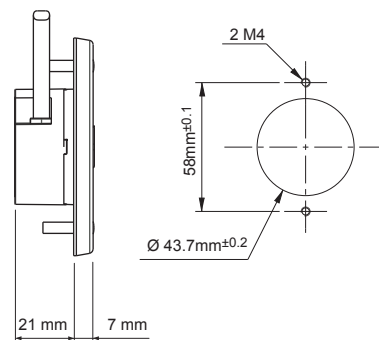

AEROSPACE
& DEFENCE



COACHES
& BUSES



RAILWAY



INDUSTRY



ENERGY



PLEASURE
BOAT



VERTICAL
TRANSPORT



INDUSTRIAL
VEHICLES



OFFSHORE
& MINING

MAFELEC
www.mafelec.com

Textes et images non contractuels

(update 2017/06)